



## **AMBIUM®** SLIMBRIGHT 250

Constantly improving light output and the quality of light, the Slimbright 250 is extremely robust and flexible. Guaranteed uniform color bin and lighting. Easy in length adjustable. Very easy to install with our adhesive tape or mounting strips.

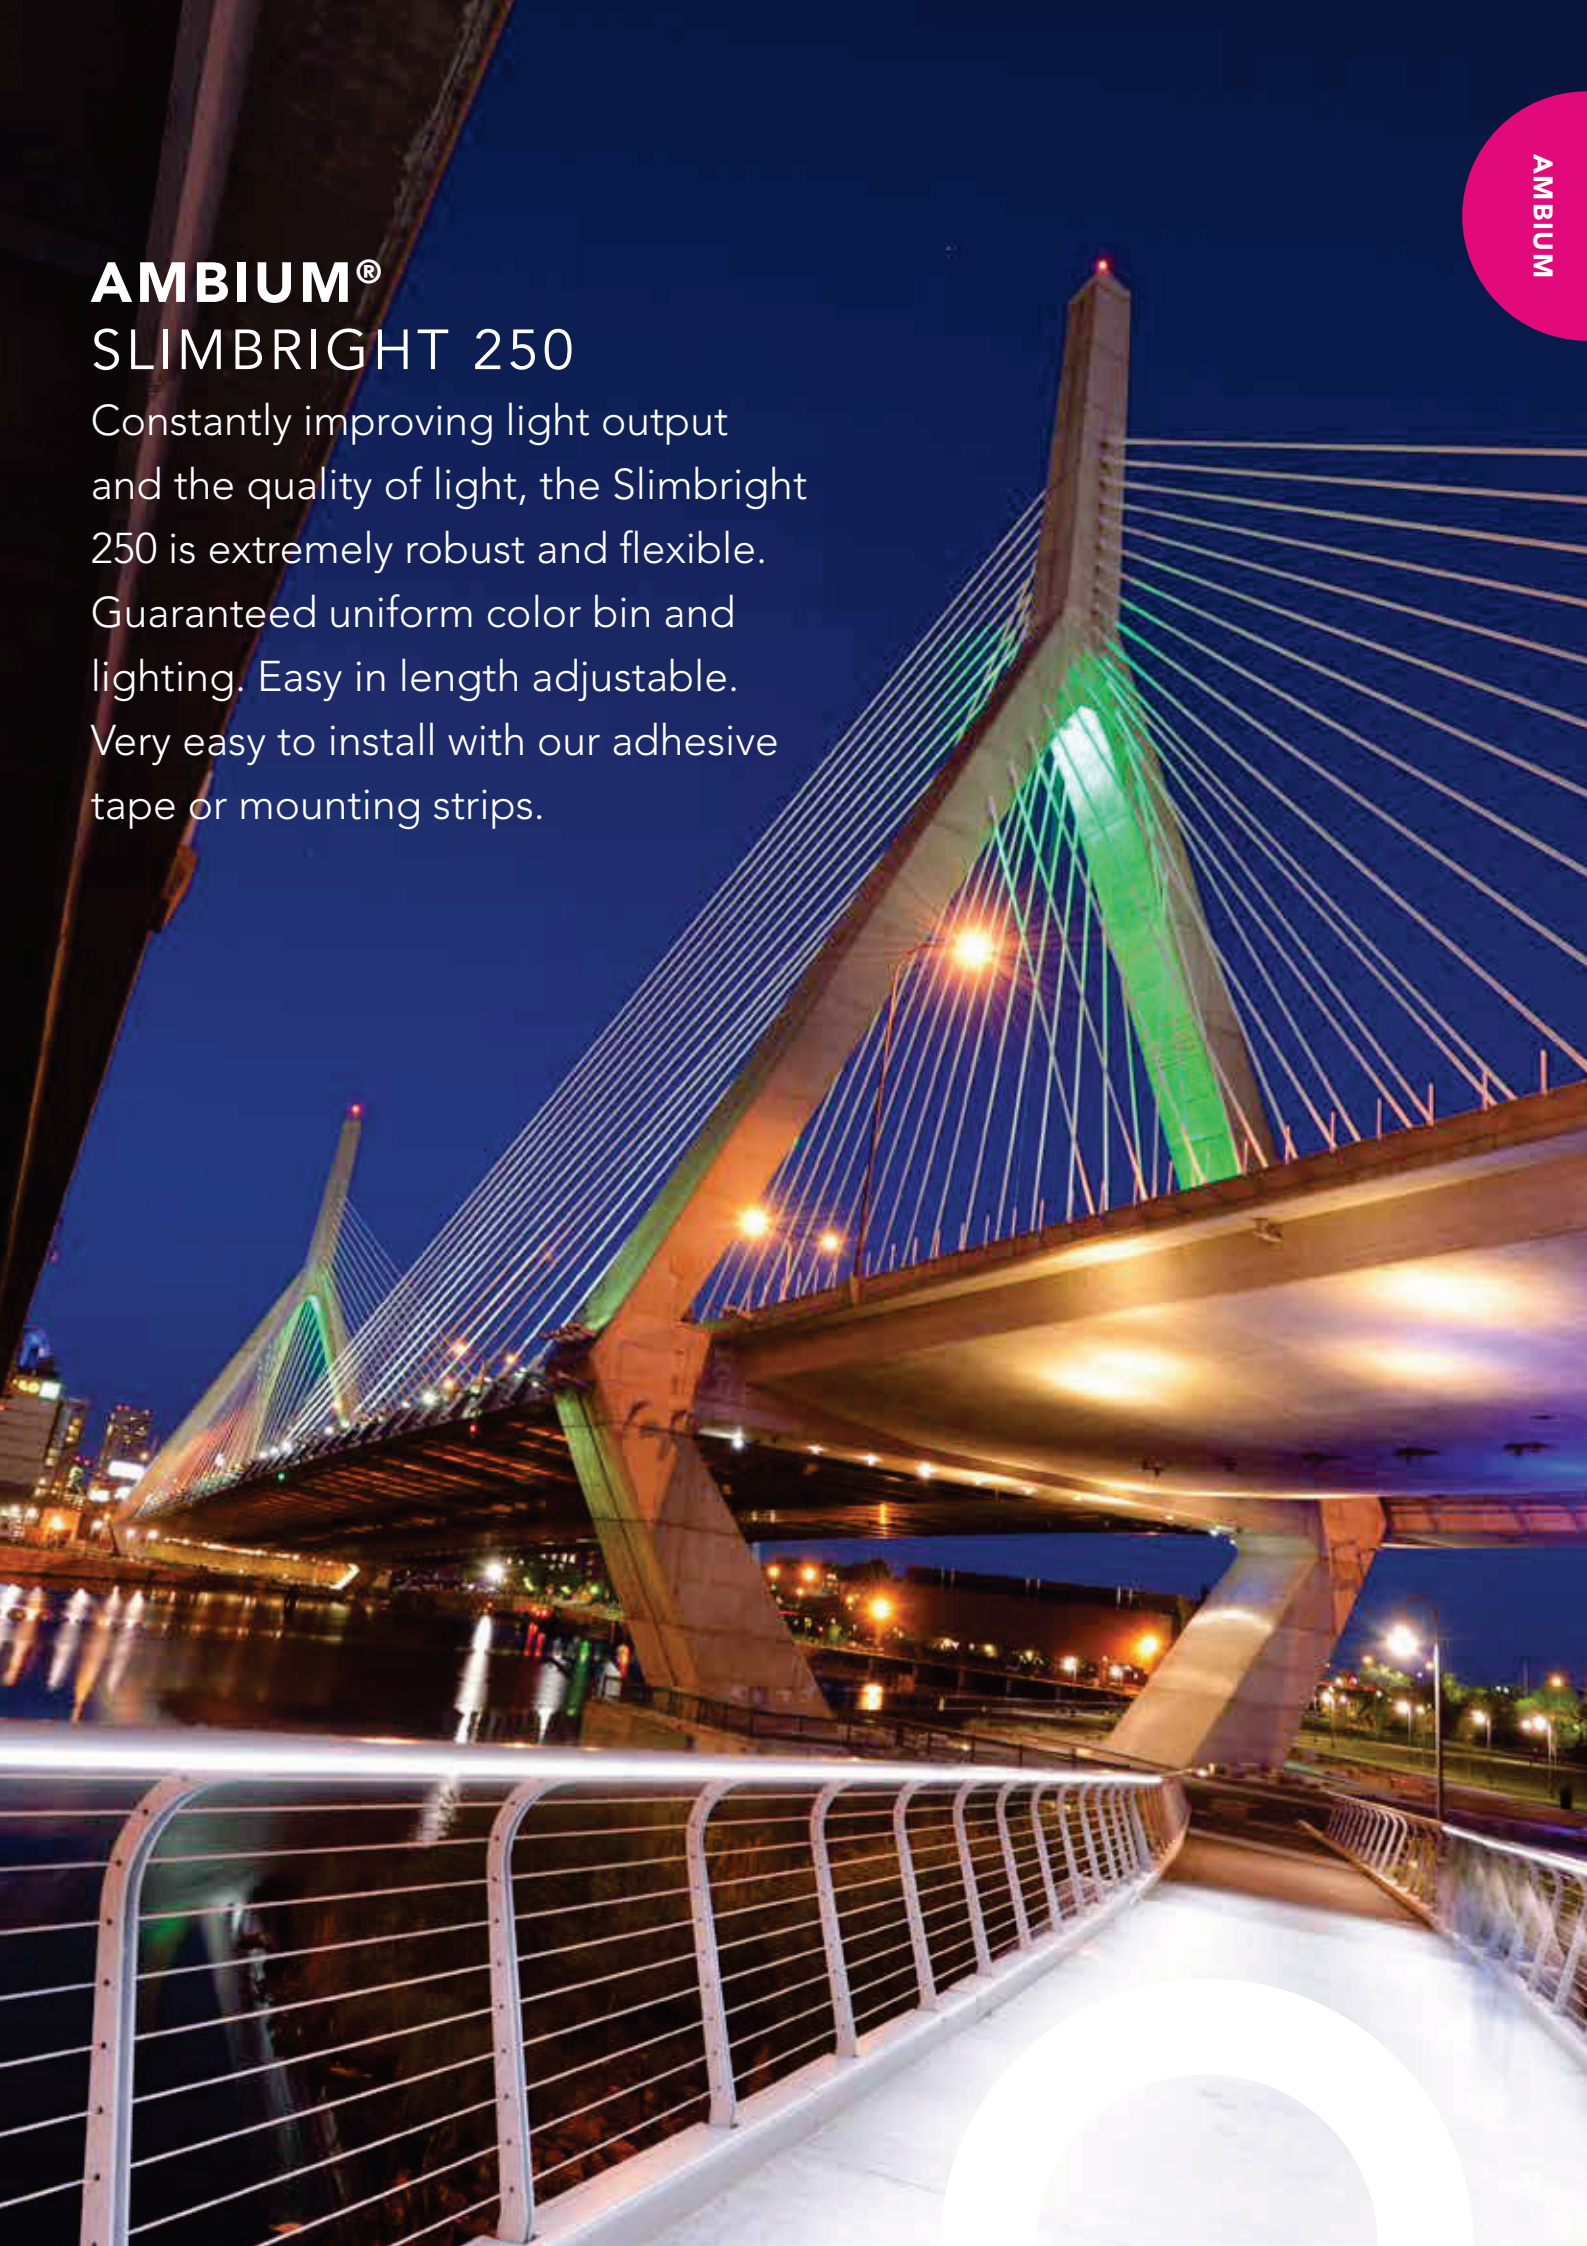

# AMBIUM® SLIMBRIGHT 250

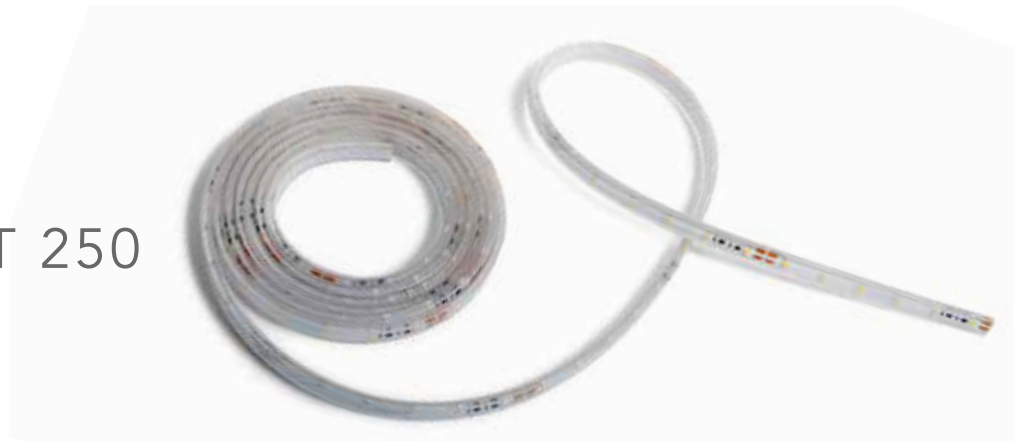

## SPECIFICATIONS

ARTICLE NUMBER	PRODUCT	COLOR TEMP	LUMEN OUTPUT	LEDS/PITCH	POWER	CRI
Outdoor		K	Lm	W	LM/W	
K929482509	Ambium SlimBright 250 1,0 m DW	6300	955	8,5	112	85
K929482508	Ambium SlimBright 250 1,0 m MW	4000	820	8,5	96	85
K929482507	Ambium SlimBright 250 1,0 m WW	3000	750	8,5	88	85
K929482519	Ambium SlimBright 250 5,0 m DW	6300	3965	40	99	85
K929482518	Ambium SlimBright 250 5,0 m MW	4000	4000	40	100	85
K929482517	Ambium SlimBright 250 5,0 m WW	3000	3750	40	94	85

Notes: Lumen values are typical. Allow +/- 15% for color binning tolerance. All products are rated IP66 and can operate between -20 to 55 °C. Warranty is 24 Months

Indoor						
K929482523	Ambium SlimBright 250i 5,0 m DW 3M taped	6300	3965	40	99	85
K929482522	Ambium SlimBright 250i 5,0 m MW	4000	4000	40	100	85
K929482521	Ambium SlimBright 250i 5,0 m WW	3000	3750	40	94	85

Notes: Lumen values are typical. Allow +/- 15% for color binning tolerance. All products are rated IP66 and can operate between -20 to 55 °C. Warranty is 24 Months

Slimbright 200 RGB						
K929481911	Ambium SlimBright 250 1,0 m RGB	RGB	n/a	5.5	n/a	85
K929481921	Ambium SlimBright 250 5,0 m RGB	RGB	n/a	26	n/a	85
K929481411	Ambium SlimBright 1,0 mtr. 200i RGB 3M pretaped	RGB	n/a	5.5	n/a	85
K929481421	Ambium SlimBright 5 m 200i RGB 3M pretaped 5 m	RGB	n/a	26	n/a	85

Notes: All products are rated IP66 and can operate between -20 to 55 °C. Warranty is 24 Months.

## DIMENSIONS (MM)

	A1	A2	B1	C1	# LED'S
	mm	mm	mm	mm	
Single color	1020	1000	12,9	5,4	48
Single color	5020	5000	12,9	5,4	240
RGB	1030	1000	12,6	5,4	36
RGB	5020	5000	12,6	5,4	180
Indoor Single Color	1020	1000	10,5	2,7	48
Indoor Single Color	5020	5000	10,5	2,7	240
Indoor RGB	1030	1000	11,5	2,7	36
Indoor RGB	5020	5000	11,5	2,7	180

