

KOLEDO


PROFESSIONAL LED SOLUTIONS

iLLumium Pixel light – KOL511 (035)




iLLumium Pixel light KOL511 (035)


Paired with mounting profiles and other mounting accessories, it can be ideally combined with the curtain wall structure. Choose from different light transmission cover parts or accessories for different surface visuals. With in-house configurations or third-party standard control systems, a variety of scenario

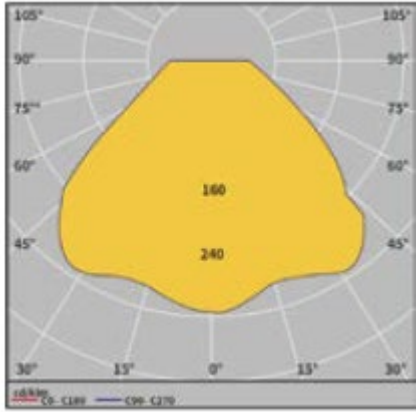

110

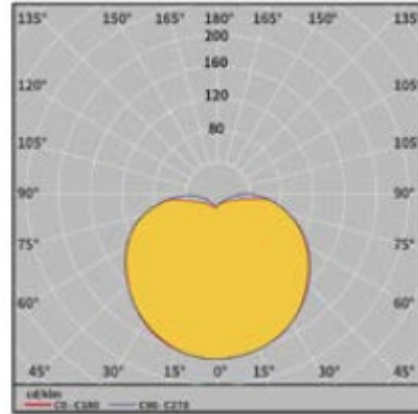

150



Technical Specifications

Material:
 Round lamp body design; usually in the form of a string of lights; a perfect combination with curtain wall structure by mounting track; a fire-resistant engineering plastic housing, injection molding; (a variety of external PC light transmission covers, extruded aluminum mounting tracks, engineering plastic surface installation and wire snaps must be configured separately)

Surface treatment: Matte treatment; track powder paint; anti-salt mist design

Housing color: Black/grey and white;

Light sources and appliances: Small power LED, Single white light (2700/3000/4000), RGB (3 in 1), RGB (3 in 1) and White

Built-in drive Control: DC15V; Switch; DMX512 Dimming

Protection: IP66
 In-line buckle glue waterproof
 IP67 waterproof connector
 Class III

Storage temperature: -40C to 70C
Operating temperature: -35 c to 50 degrees C

Installation and adjustment: Optional track mount strap directly secured on the mounting track and fixed directly to the surface or wire rope via surface mounting and wire snaps





38*34*10



38*35*23




20*37*9



D=35 H=6



D=35 H=20.5



1000*67.5*35



1000*67.5*35

Accessories

Clips, covers and rail



Accessories

Quality IP67 cable in different length, with or without connector