

# PACIFIUM® LEDstrip-WHT


## SPECIFICATIONS



ARTICLE NUMBER	PRODUCT	COLOR TEMP	LUMEN OUTPUT	POWER	EFFICIENCY	CRI	VOLTAGE	LEDS / METER	IP RATING	TEMP
		K	lm/m*	W/m	lm/W		V			°C
KSBPCW06022010	Pacifium-WHT-922-060	2200	440	4.8	91	90+	24	60	20	-20 to 60
KSBPCW06025010	Pacifium-WHT-925-060	2500	440	4.8	91	90+	24	60	20	-20 to 60
KSBPCW06027010	Pacifium-WHT-927-060	2700	440	4.8	91	90+	24	60	20	-20 to 60
KSBPCW06030010	Pacifium-WHT-930-060	3000	440	4.8	91	90+	24	60	20	-20 to 60
KSBPCW06040010	Pacifium-WHT-940-060	4000	440	4.8	91	90+	24	60	20	-20 to 60
KSBPCW08422010	Pacifium-WHT-922-084	2200	880	9.2	95	90+	24	84	20	-20 to 60
KSBPCW08425010	Pacifium-WHT-925-084	2500	880	9.2	95	90+	24	84	20	-20 to 60
KSBPCW08427010	Pacifium-WHT-927-084	2700	880	9.2	95	90+	24	84	20	-20 to 60
KSBPCW08430010	Pacifium-WHT-930-084	3000	880	9.2	95	90+	24	84	20	-20 to 60
KSBPCW08440010	Pacifium-WHT-940-084	4000	880	9.2	95	90+	24	84	20	-20 to 60
KSBPCW12022010	Pacifium-WHT-922-120	2200	1080	10.8	100	90+	24	120	20	-20 to 60
KSBPCW12025010	Pacifium-WHT-925-120	2500	1080	10.8	100	90+	24	120	20	-20 to 60
KSBPCW12027010	Pacifium-WHT-927-120	2700	1080	10.8	100	90+	24	120	20	-20 to 60
KSBPCW12030010	Pacifium-WHT-930-120	3000	1080	10.8	100	90+	24	120	20	-20 to 60
KSBPCW12040010	Pacifium-WHT-940-120	4000	1080	10.8	100	90+	24	120	20	-20 to 60
KSBPCW18022010	Pacifium-WHT-922-180	2200	1550	14.8	104	90+	24	180	20	-20 to 60
KSBPCW18025010	Pacifium-WHT-925-180	2500	1550	14.8	104	90+	24	180	20	-20 to 60
KSBPCW18027010	Pacifium-WHT-927-180	2700	1550	14.8	104	90+	24	180	20	-20 to 60
KSBPCW18030010	Pacifium-WHT-930-180	3000	1550	14.8	104	90+	24	180	20	-20 to 60
KSBPCW18040010	Pacifium-WHT-940-180	4000	1550	14.8	104	90+	24	180	20	-20 to 60
KSBPCW24022010	Pacifium-WHT-922-240	2200	2010	16.3	123	90+	24	240	20	-20 to 60
KSBPCW24025010	Pacifium-WHT-925-240	2500	2010	16.3	123	90+	24	240	20	-20 to 60
KSBPCW24027010	Pacifium-WHT-927-240	2700	2010	16.3	123	90+	24	240	20	-20 to 60
KSBPCW24030010	Pacifium-WHT-930-240	3000	2010	16.3	123	90+	24	240	20	-20 to 60
KSBPCW24040010	Pacifium-WHT-940-240	4000	2010	16.3	123	90+	24	240	20	-20 to 60

lm\* Lumen are measured at 1 meter above the module. Lumen values are typical. Allow +/- 15% for color binning tolerance. The Pacifium LEDSTRIP is intended for built-in outdoor & indoor use only. The Pacifium LEDSTRIP should not be directly exposed to the elements like snow, water and ice.

## SCHEMATIC

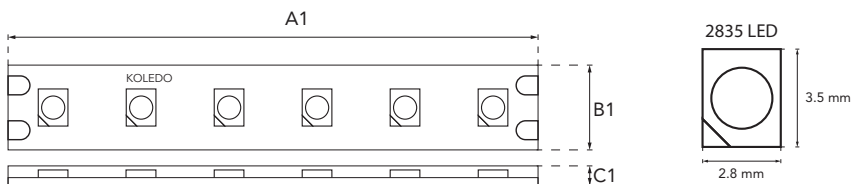

## DIMENSIONS (MM)

PRODUCT	A1	B1	C1	D1	#LEDS
	mm	mm	mm	mm	#
Pacifium-WHT-9##-060	10000	10	2	16.7	60
Pacifium-WHT-9##-084	10000	10	2	11.9	84
Pacifium-WHT-9##-120	10000	10	2	8.3	120
Pacifium-WHT-9##-180	10000	10	2	5.5	180
Pacifium-WHT-9##-240	10000	10	2	4.2	240

## LIGHT DIAGRAM

